


**time™**

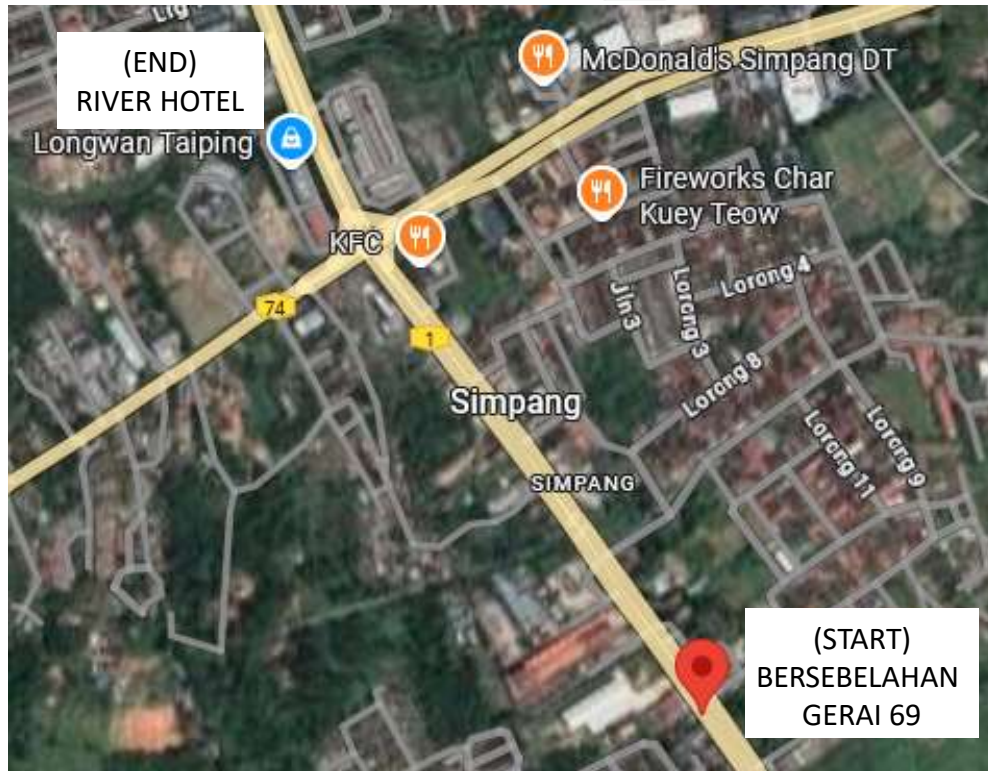

**PROPOSED TO UPGRADE FROM  
OVERHEAD TO UNDERGROUND  
INFRASTRUCTURE FOR CPCS LINK  
TRONG - KUALA KURAU**

**AREA 2 : CIVIL (HDD)**

**Location : 4.814951 , 100.709777 (START)  
4.822699 , 100.704677 (END)**



## TABLE OF CONTENTS:

### **BUILDING GENERAL INFORMATION**

#### **1. PROPOSAL FOR FIXED NETWORK ACCESS**

- 1.1 INTRODUCTION
- 1.2 EXTERNAL AND INTERNAL TRENCHING
- 1.3 LOCATION MAP (WITH GPS COORDINATE)

#### **2. APPENDIX A**

- 2.1 PRODUCT PORTFOLIO
- 2.2 DRAWING – SITE PLAN
- 2.3 DRAWING – SLD
- 2.4 DRAWING - BOUNDRY
- 2.5 LIST OF HOMEPASS

#### **3. APPENDIX B**

- 1. PHOTO
  - 1. SITE PHOTOS
- 2. OTHER ATTACHMENT
  - 1. BIL OF QUANTITY (BoQ)  
**- PLEASE REFER ATTACHMENT**



# TP CHECKLIST

<b>TP CHECKLISTS</b>				
		<b>YES</b>	<b>NO</b>	<b>Remarks</b>
1	TDC existing manhole coordinate	/		4.814951 , 100.709777 4.822699 , 100.704677
2	Existing manhole/infra by development (coordinate)		/	
3	Any Gas pipe signage seen at site? If YES, attach photo.		/	
4	Any TNB cable signage seen at site? If YES, attach photo		/	
5	Any crossing drainage? If YES, attach photo & width of the drainage		/	
6	Any INDAH WATER manhole seen at site? If YES, attach photo		/	
7	Any crossing traffic light? If YES, attach photo & measurement of the traffic light box		/	
8	Has identified Local Authority or Development Comittee? Kindly indicate.	/		
9	Drawing for outside plant (OSP) survey - Development Access & civil work up to last TIME manhole (.dwg format - autocad & .pdf format) *	/		
10	Prepare the complete 1 copy of Technical Proposal (.pdf format & Word Format) -of softcopy - 1 copy	/		
11	Bill of Quantity for civil, fibre pulling, splicing & termination	/		
12	The latitude & longitude of the development location, last TIME manhole and development manhole (if any) in 6 decimal points (xx.xxxxxx, x.xxxxxx) in TP Location Map.	/		
13	Open up the manhole at any spot of joint/ring cut & provide duct space record for this project (photo required). Please make sure that there is TIME cable in the manhole (photo required). <b>If unable to open up the manhole, photo of manhole surrounding is required.</b>		/	
14	Survey Acknowledgement Form signed & attached.	/		
15	Others		/	



**GENERAL INFORMATION**

Prepared by : PROSPEK DINAMIK SDN BHD

Date of LOI :

Date of Survey : 03/09/2025

Surveyed by : MUHAMMAD AIZAT BIN ABDUL RAHMAN

Drawing Prepared by: MUHAMMAD AIZAT BIN ABDUL RAHMAN

Eng. Person In charge :

**General Information**

Site Name : TRONG - KUALA KURAU  
Full Address: JALAN SIMPANG, SIMPANG , 34700  
SIMPANG PERAK

Type of Development:  
No of Unit:  
No of unit per row/block:  
No of row/block per Dev :

**Contact Person**

**Management / Dev  
Committee**

Name: H/P  
Designation: - Tel  
Email Address:

**Maintenance / Security  
Department**

Name: Designation: Email NA H/P Tel NA  
Address: NA  
-

**Comments**

**For TimeDotComBhd Use Only**

Remarks



## **1. PROPOSAL FOR FIXED ACCESS**

### **1. Introduction**

1. TIME dot Com offers a wide variety of fixed-line telecommunications services. As part of our commitment to provide our customers with the best possible solutions to serve all their communications needs; we aim to enhance telecommunication services in your building to offer your tenants with High Speed Internet, Data and Voice connectivity. Your premises will be enhanced today for tomorrow's communication and IT requirements. With that, we provide a choice of Service Providers to your tenants and your building gains a future-proof communication infrastructure.

1.1.2 A physical infrastructure link to the building is the main access to deliver services to the tenants. The typical link required is through fiber optic cable.

1.1.3 In order to support the services, TIME dot Com (TdC) require an access to the building MDF rooms in order to provide services to the end user.


1.1.4 To be able to deliver these services to your building, we will pull our own fiber optic cables from our nearest hub and place our access equipments into building MDF rooms and telephone riser closet.

In order to reach tenants at each floor of the buildings, we will utilize existing D-side internal cabling of building MDF room via telephone riser room before it branches out to each floor/lot of the building.

1.1.5 With this setup we will have TdC connection right up to each floor of the building.

### **2. External and Internal Trenching**

1. The propose route will start from the propose TDC Manhole at jalan Tun Dr Awang to the Mdf Room using new proposed duct by TDC.
2. The permission to trench inside local authority jurisdiction (MBPP) to be applied separately if necessary.
3. This proposal is based on assumption that there is fiber cable to be connected in the existing TIME manhole.

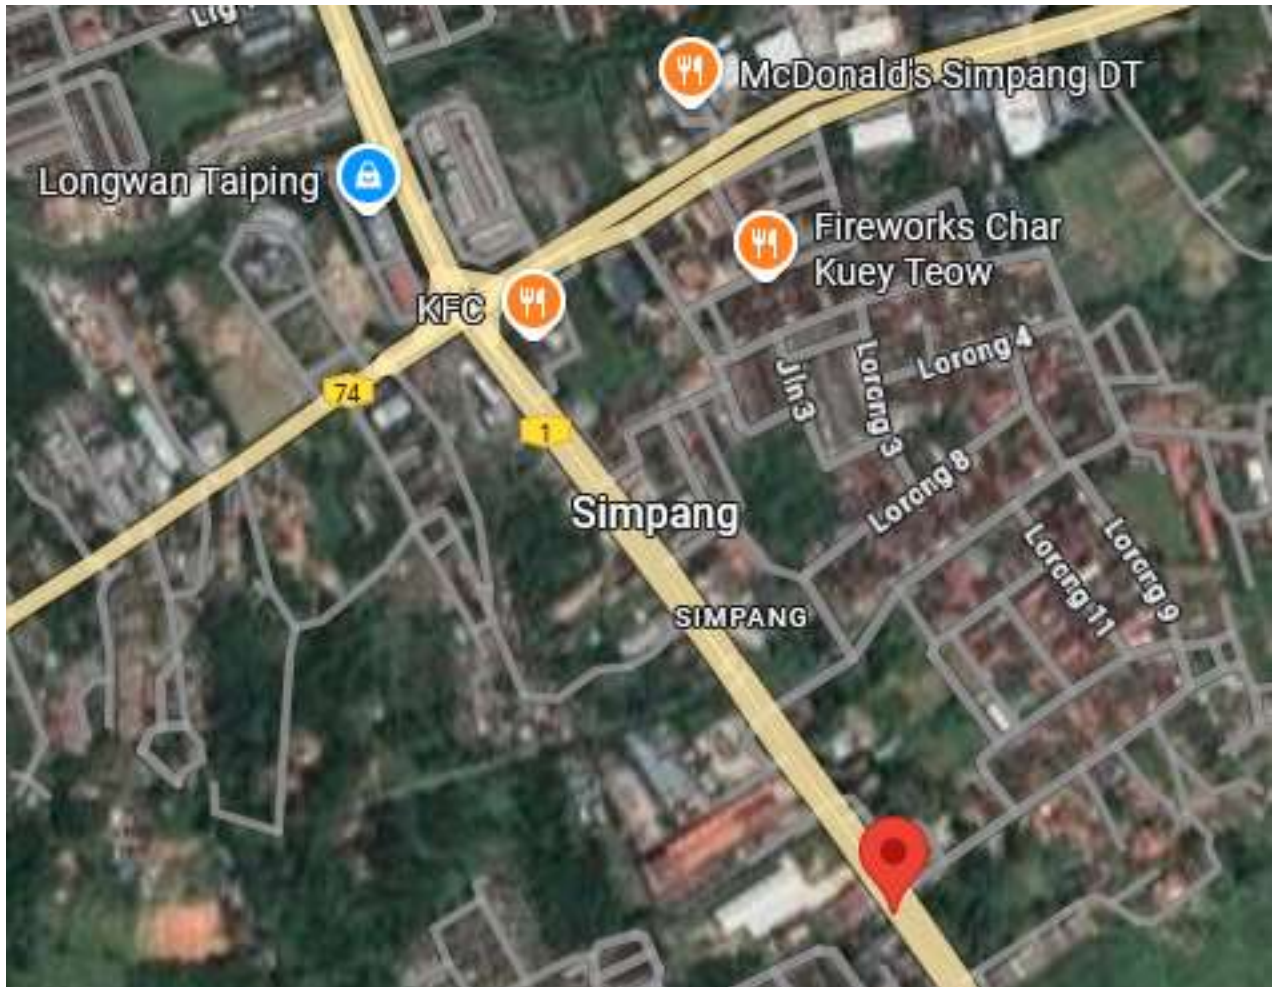

**PROPOSED TO UPGRADE FROM  
OVERHEAD TO UNDERGROUND  
INFRASTRUCTURE FOR CPCS LINK  
TRONG - KUALA KURAU**

**Location : 4.814951 , 100.709777 (START)  
4.822699 , 100.704677 (END)**



## 2 APPENDIX A

### 2.1 Product Portfolio

#### TIME DOT COM CONNECTIONS FOR COMMERCIAL

<b>Private Data Network</b>	<p>Our Virtual Private Network (VPN) is designed to deliver you an efficient, secured and reliable service. We provide point-to-point technology that directly connects you to your clients and employees. We ensure complete privacy and security, while at the same time, maximizing your speed and bandwidth;</p> <ul style="list-style-type: none"><li>⇒ Channelized Leased Circuit</li><li>⇒ Ethernet Leased Circuit</li><li>⇒ International Private Leased</li><li>⇒ Circuit (IPLC)</li><li>⇒ Metro LAN</li><li>⇒ International Ethernet Private Leased Circuit (IEPLC)</li></ul>
<b>Internet</b>	<p>TIME Internet services allow you to connect to the world speedily with high scalability, reliability and security. Choose the best solution that suits your need and TIME will take care of the rest;</p> <ul style="list-style-type: none"><li>⇒ Channelized Direct</li><li>⇒ Ethernet Direct</li><li>⇒ Business Broadband</li><li>⇒ Satellite Broadband</li><li>⇒ Home Broadband</li></ul>
<b>Voice</b>	<p>We've got a wide range of services from basic phone line with crystal clear voice quality to our account based postpaid Virtual Call service. We also provide local and International toll free services, and even business or individual calling cards. With TIME, it's so easy to stay in touch;</p> <ul style="list-style-type: none"><li>⇒ Business Voice Line</li><li>⇒ ISDN PRI</li><li>⇒ International Toll Free</li><li>⇒ Toll Free 1300</li><li>⇒ Toll Free 1800</li><li>⇒ Audio Conferencing</li><li>⇒ Home Fixed Line</li></ul>
<b>Managed Services</b>	<p>TIME Managed Services deliver end-to-end networking solutions. Focus on your productivity while we provide you with support possible to take your business to the next level;</p> <ul style="list-style-type: none"><li>⇒ IPVPN</li><li>⇒ SAN Extension</li></ul>
<b>Wholesale Service</b>	<p>We are able to offer you unmatched capacity and network resiliency. We aim to ensure seamless connectivity and high availability, thus maximizing your operational capabilities;</p> <ul style="list-style-type: none"><li>⇒ Wholesale bandwidth</li><li>⇒ Wholesale Voice (Transit Premium, Transit CLR)</li><li>⇒ Cross Peninsular Cable System (CPCS)</li></ul>



# time™

## TRONG - KUALA KURAU



PROPOSED NEW  
MH 1  
200M (HDD)

START →

**TRONG - KUALA KURAU**  
**MH 1**  
**03/09/25 10.58**  
**4,81502, 100.70971**  
**1, SIMPANG, 34700 SIMPANG**

**time**<sup>TM</sup>



PROPOSED NEW  
MH 2  
200M (HDD)

**TRONG - KUALA KURAU**  
**MH 2**  
**03/09/25 11.02**  
**4,81649, 100.70867**  
**NO. 728A, LORONG 2,**  
**SIMPANG, 34700 SIMPANG**


**time**<sup>TM</sup>



PROPOSED NEW  
MH 3  
200M (HDD)

**TRONG - KUALA KURAU**  
**MH 3**  
**03/09/25 11.06**  
**4,81802, 100.70756**  
**43A, 1, SIMPANG, 34700**  
**SIMPANG**

**time**<sup>TM</sup>

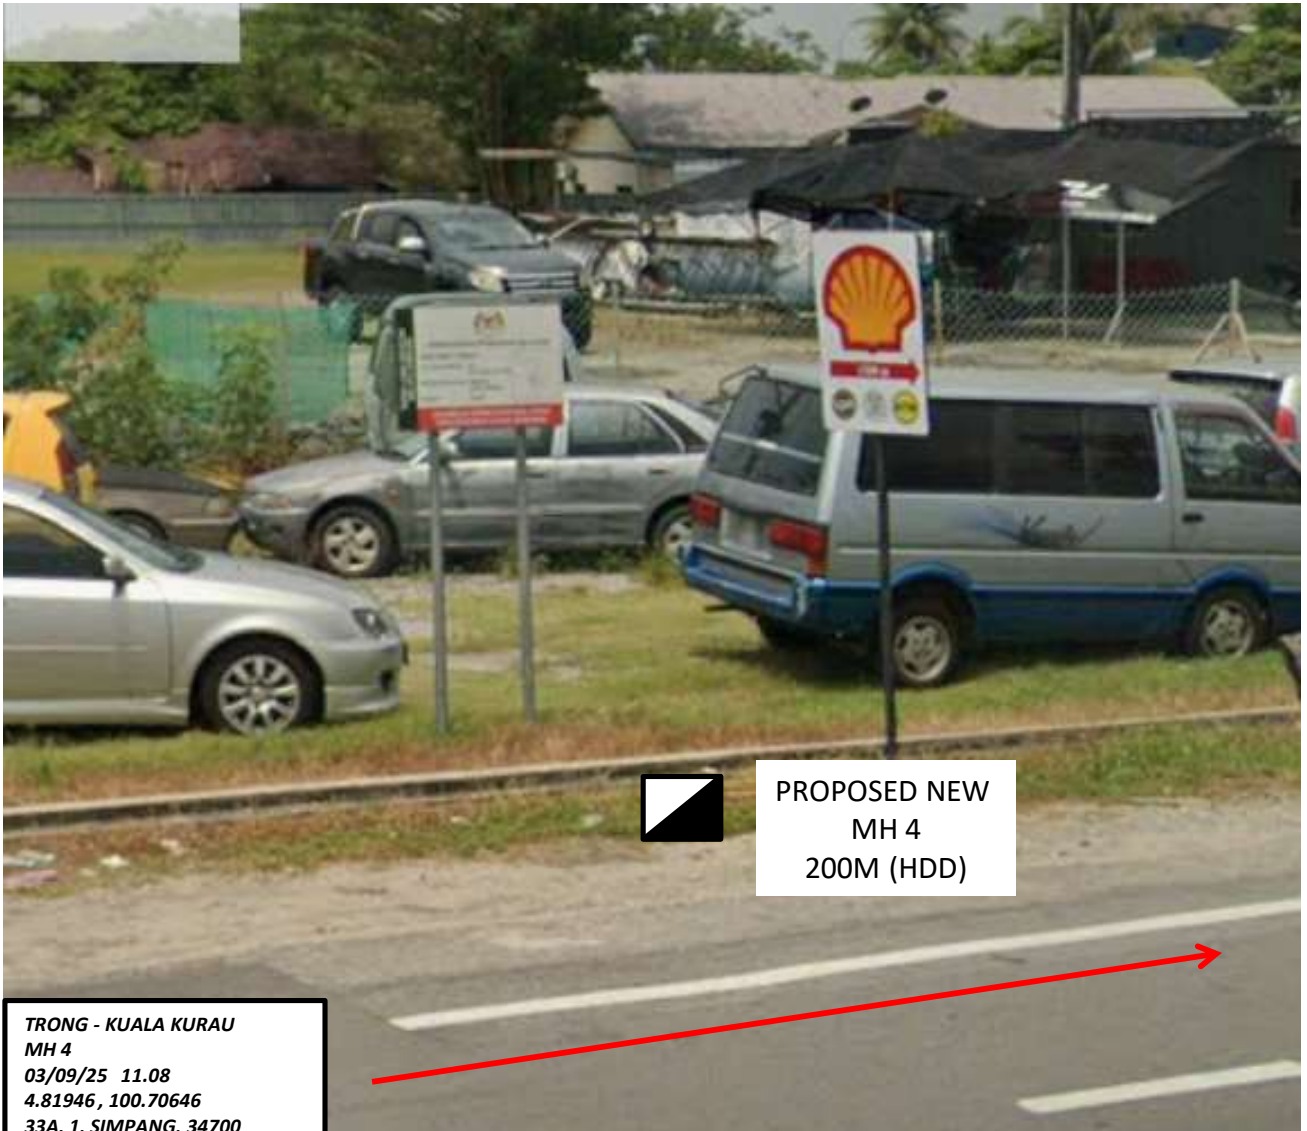

**TRONG - KUALA KURAU**  
**MH 4**  
**03/09/25 11.08**  
**4.81946, 100.70646**  
**33A, 1, SIMPANG, 34700**  
**SIMPANG**

# time™



EXISTING MH TIME  
MH 5  
160M

**TRONG - KUALA KURAU**  
**MH 5**  
**05/11/25 11.20**  
**4.82078, 100.70545**  
**37, SUSUR SIMPANG, 34000**  
**TAIPING PERAK**

**time**<sup>TM</sup>



PROPOSED NEW  
MH 6  
250M (HDD)



**TRONG - KUALA KURAU**  
**MH 6**  
**03/09/25 11.13**  
**4.82265, 100.70472**  
**86, JALAN KAMPUNG DEW,**  
**34700 SIMPANG**

**END**