




Technical Proposal for TM Project




Project Description:	RWOA CWS TM HDPN PROTON CITY TANJUNG MALIM (A3A112506009)
Project Number:	191000005832
TM Node	TM
Region	NORTHERN (PERAK)
NE ID	RWA2600010
Total FTTH Ports	-
Total Property	-
PF (%)	-
RFSI Date	30 OCT 2026
GPS Coordinate	3.744850, 101.501845

Prepared by:	MOHD AZRIN BIN AZIZAN
Company Name:	KAZAKON SDN BHD
Date:	1 JUL 2026
TP Revision:	1

1.1 Civil Plan

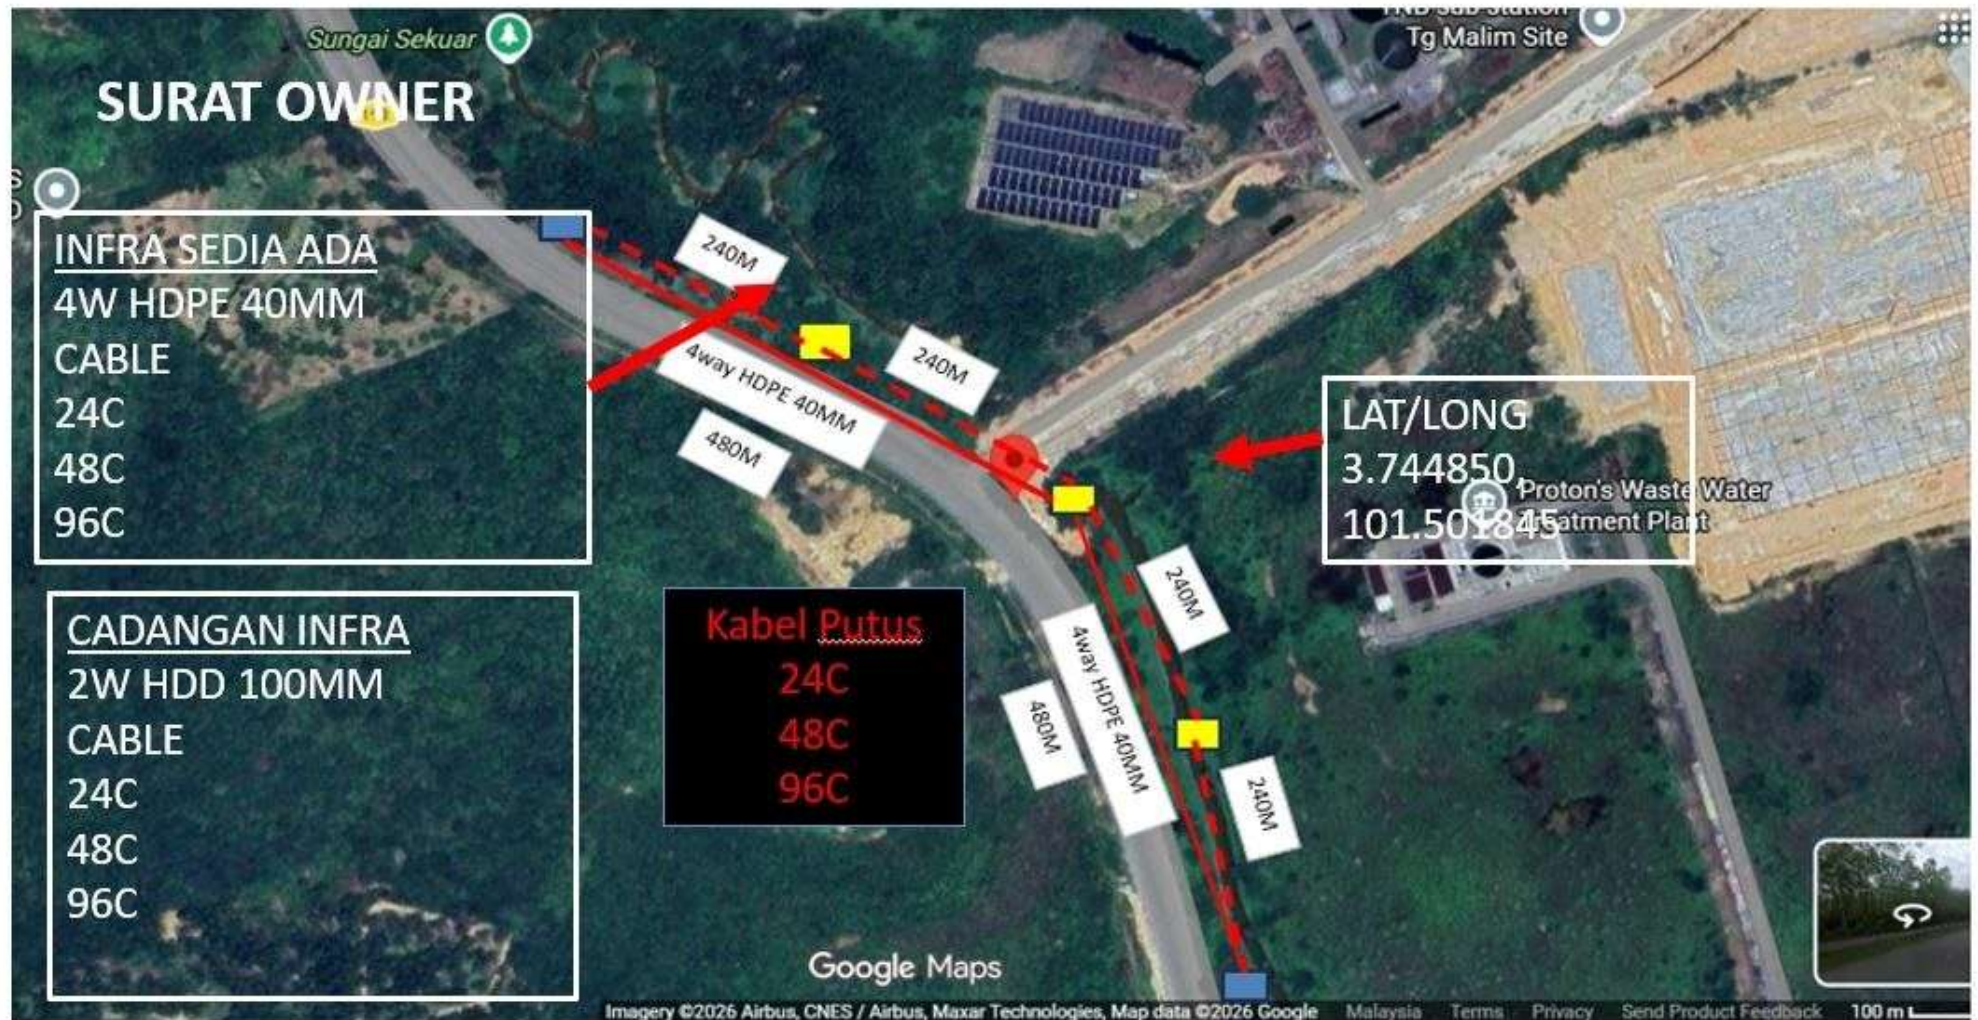


1.1 Civil Plan

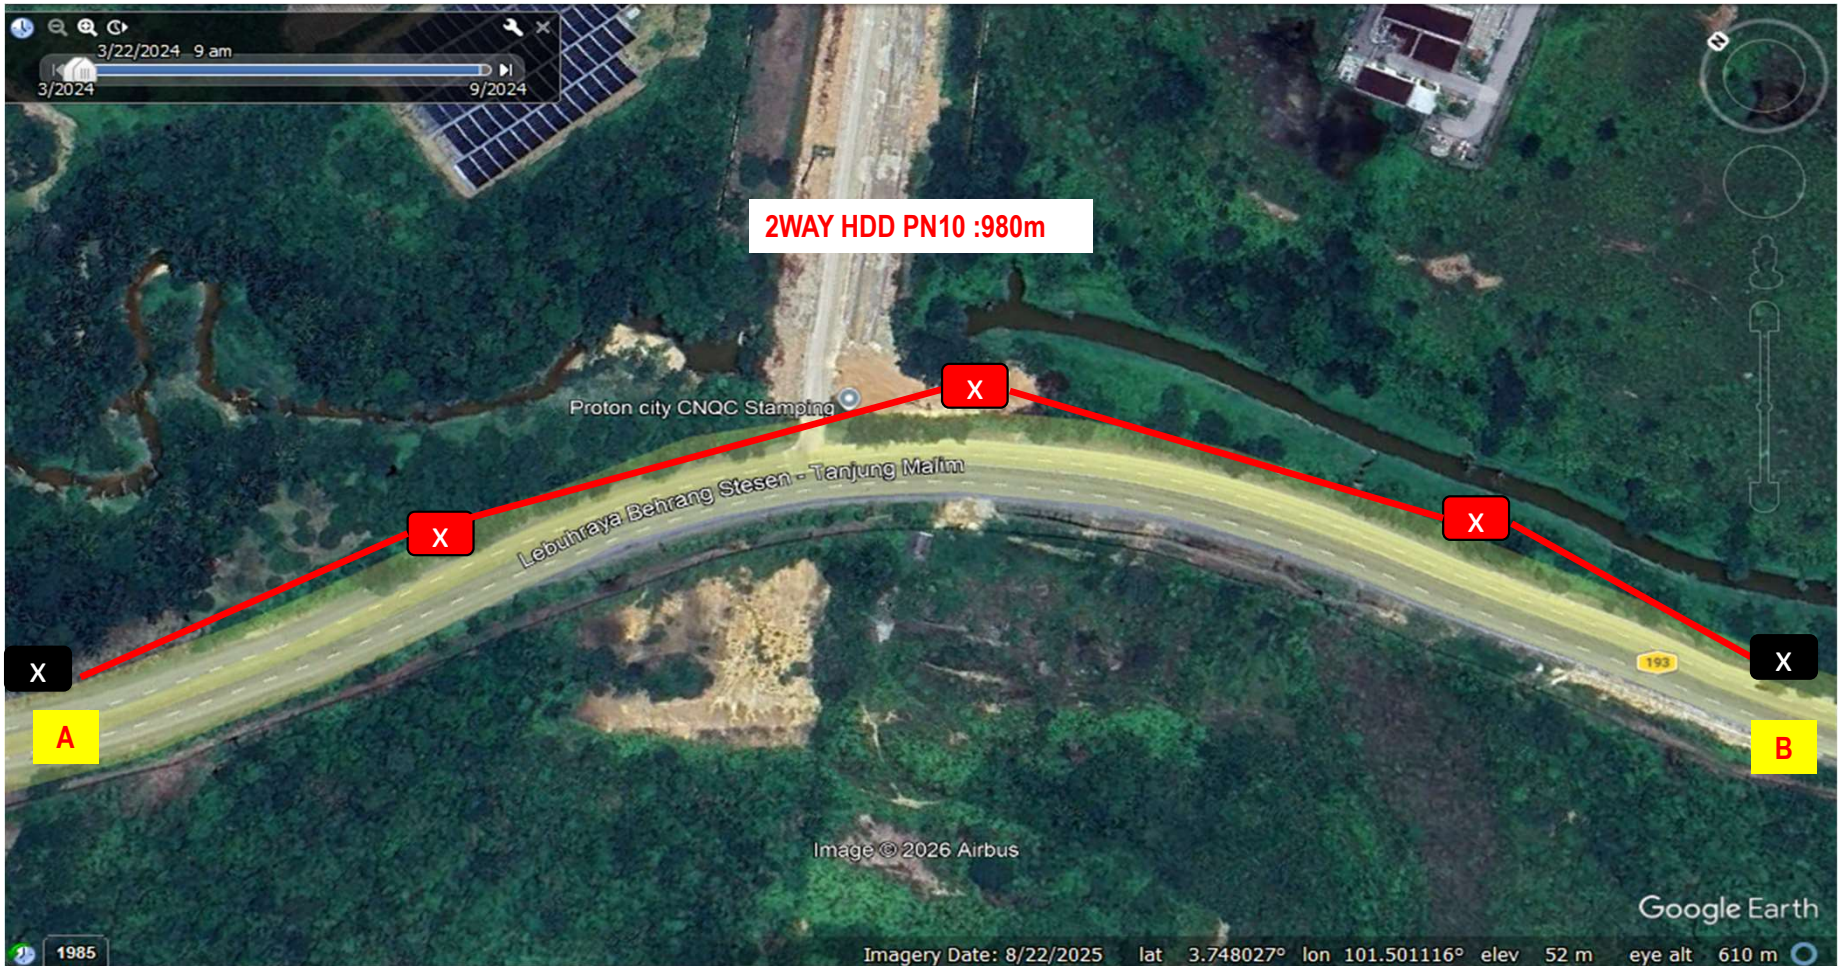

1.1 Civil Plan

2WAY HDD PN10 :980m

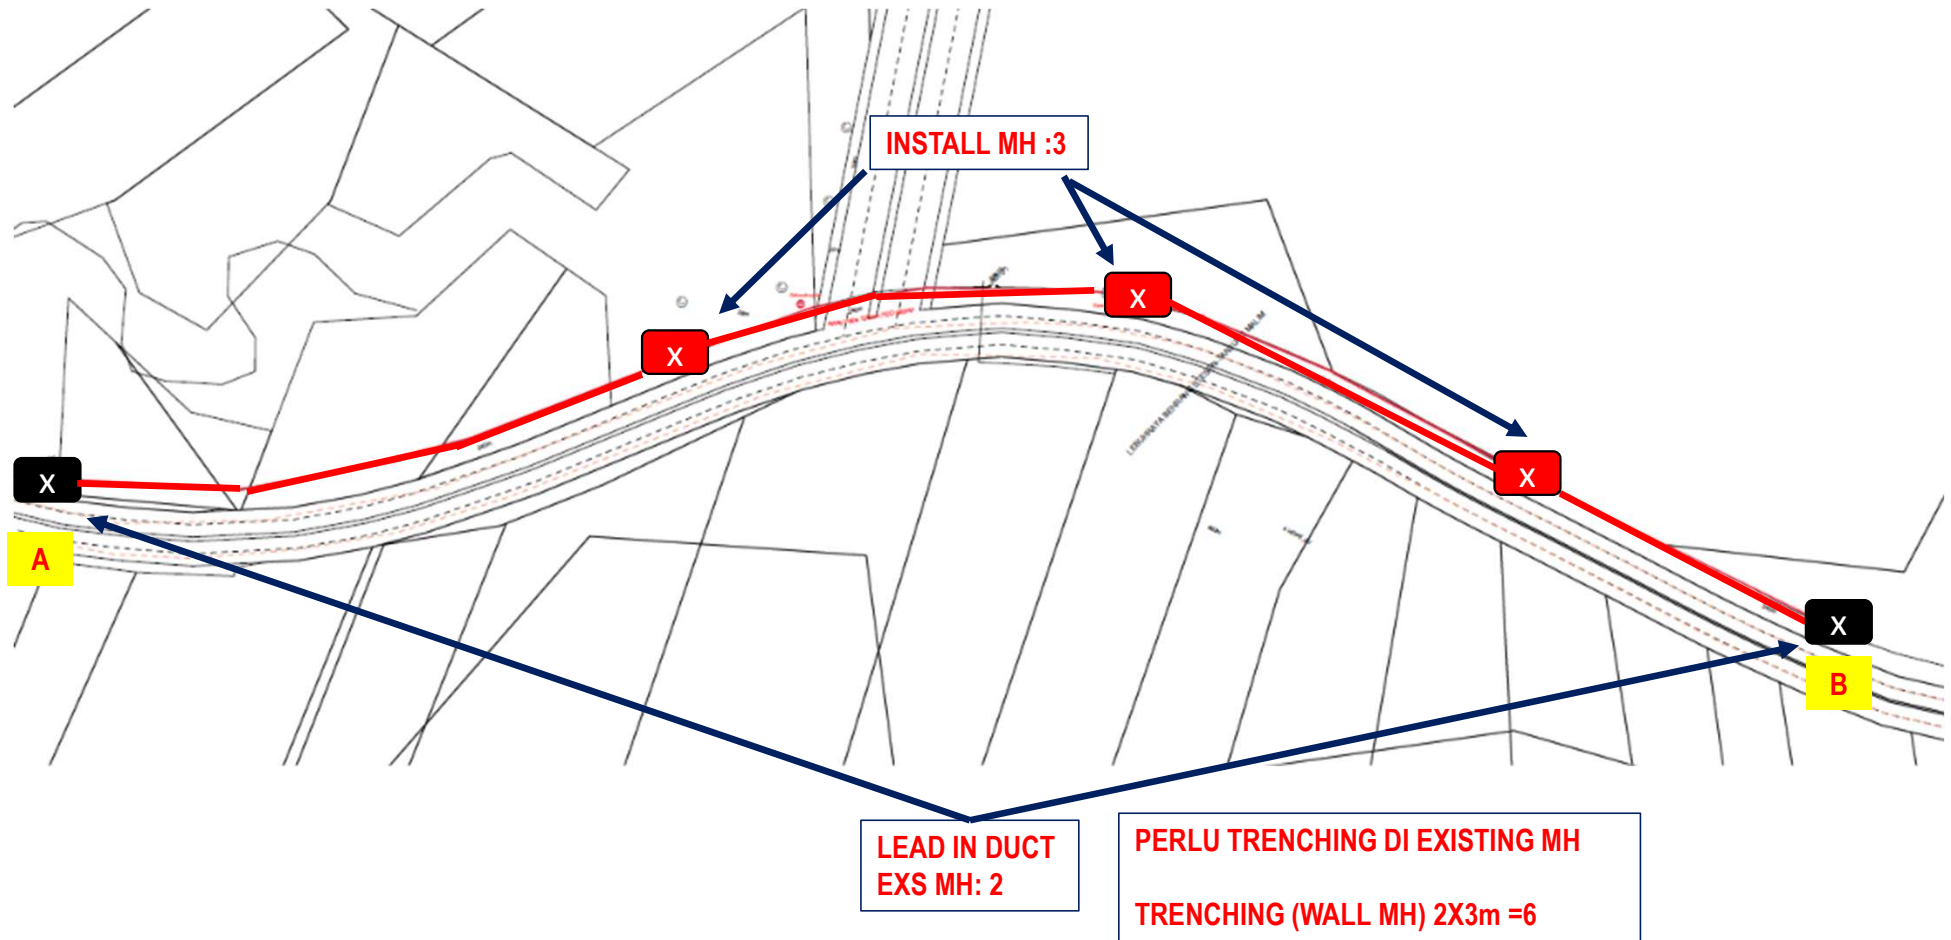


1.1 Civil and manhole Details

No	Info	Details	Remark
1	Method	HDD	
2	Number of ways	2	
3	Distance	980m	
4	Entrance manhole Coordinate	A, 3.746440, 101.499325	
5	Exit manhole coordinate	B , 3.741614, 101.503184	
6	Install MH	3 (JRC7)	

1.2 **Manhole details**

No	Manhole ID	Manhole Type	GPS Coordinate
1	1	JRC7	3.746440, 101.499325
2	2	JRC7 -NEW	3.745686, 101.500840
3	3	JRC7 -NEW	3.744776, 101.502063
4	4	JRC7 -NEW	3.743817, 101.502481
5	5	JRC7	3.741614, 101.503184

1.2 Civil and Manhole plan illustration

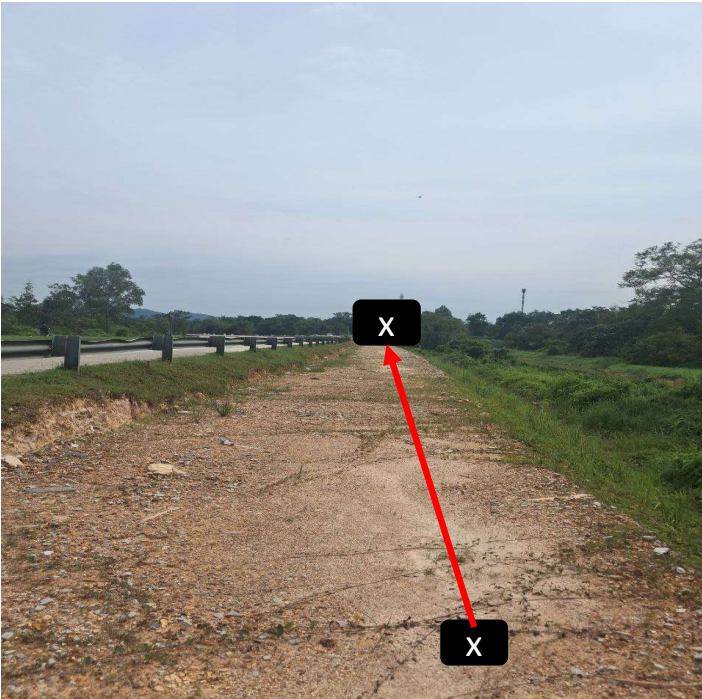


Manhole 1-2 – JRC7



Manhole 2-3 – JRC7

1.2 Civil and Manhole plan illustration

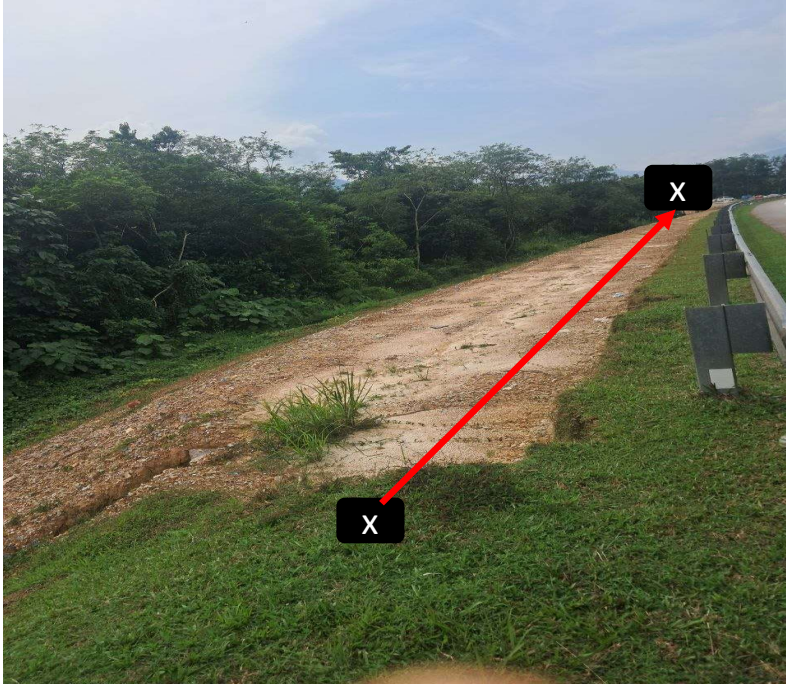

Manhole 3-4 – JRC7

4.1 BIL OF QUANTITY - BOQ

Contract NO	3400049624
Vendor No	1003219
Project No	191000005832
Region	PERAK
Exchange	TM
BOQ Date	1 JUL 2026
LOR ID	PRK-KZK-2618691-TP



NO	ITEMS		RATE	REQ QUANTITY	TOTAL
1	908200	DSGN/S/I 2-WAY HDPE DUCT PN10	210.50	980	RM 206,290.00
2	108392	INS MANHOLE PRE-FAB JRC7	491.12	3	RM 1,473.36
3	108464	LEAD IN DUCTS UP TO 4 WAY TO EXST M/HOL	174.69	2	RM 349.38
4	908138	S/I 2 WAY OPEN TRENCHING (ORI MAX)	60.52	6	RM 363.12
		Material Management Fee			RM 16.34
		SST 6%			RM 12,509.53
		TOTAL COST			RM 221,001.73

END OF TECHNICAL PROPOSAL