

TECHNICAL PROPOSAL (OSP)



LOCATION A

LAT : 4.512503 LONG : 101.048636



LOCATION B

LAT : 4.516920 LONG : 101.053412

EXISTING CIVIL INFRASTRUCTURE ,PROPOSED 1WAY OPENCUT PULLING FIBRE OPTIC CABLING

Project Name: TP EX IMPLEMENTATION - JALAN PERINDUSTRIAN PENGKALAN (TASEK)

Region : NORTHERN

Site/Link Name : 12-0289_4323A_LAP BEMBAN_4517A_PENGGKALAN LAHAT

Site A : 12-0289_4323A_LAP BEMBAN

Site B : 4517A_PENGGKALAN LAHAT

Table of Contents

1.0 OSP

- Section 1 : Proposal Sign-off sheet
- Section 2 : OSP & ISP Summary
- Section 3 : Bill of Quantity (Without Pricing)
- Section 4 : OSP Routing Plan
- Section 5 : OSP Snapshot
- Section 6 : Room/Cabin Layout
- Section 7 : 3rd Party Dependency Listing
- Section 8 : Work Schedule

1.0 OSP

Section 1: Proposal Sign-off sheet

This proposal is to provide exiting civil infrastructure and new pulling fibre optic cabling for link below :

Location A : 12-0289_4323A_LAP BEMBAN

Location B : 4517A_PENGGALAN LAHAT

Contractor

Name : MUTANIC TECHNOLOGY SDN BHD.

Signature : 

Check & Approved date : 28/05/2025

Submission Date : 28/05/2025

CelcomDigi Authorized Personel

Verify By

Signature : _____

Name : _____

Date : _____

Approved By

Signature : _____

Name : _____

Date : _____

OSP Summary

Overall proposed Civil Infrastructure Design Distance		750	meter
a.	MICRO Trenching	N/A	meter
b.	Horizontal directional drilling	N/A	meter
c.	Carriage way open cut trenching	750	meter
d.	Proposed Cable Trunking	N/A	meter
e.	Grass Verge open cut trenching	N/A	meter
f.	Other (LAMP POLE)	N/A	meter
g.	Exist cable ladder (in cabin)	N/A	meter
Pulling new cable 144C (DIGI)		780	meter
Pulling new cable 96C (CELCOM)		780	meter
Proposed new closure 144C		2	pc
Proposed new closure 96C		2	pc
Demolish Existing Manhole		N/A	pc
No. of proposed Manhole/Joint Box/JB30		N/A	pc
EXIST M/H		4	pc
Area of milling work required		N/A	meter ²
Estimated timeline required for job completion		N/A	days

Existing Infrastructure Information

Preceding duct/sub-duct space	N/A
Preceding duct/sub-duct condition	N/A
Existing / tapping manhole	MH condition ok
Existing cable/fiber condition	Temporary cable

TENAGA Pole Option:

TNB pole availability	N/A
Distance of the TNB poles	N/A
Constraint	N/A

3rd parties Dependencies

Item	Parties involve and location
LA/LC	KUDR, JKR Perak
LLM / KTM / SBC / etc	N/A
Building Management / Land Lord	N/A
Private Owners	N/A

Other Highlights/Remark

<p>TTP</p> <ul style="list-style-type: none"> - TP replace temporary cable for XD - TP to repair infrasturcture and replace the temporary cable with a permanent one - Incident: Pengkalan Industry to Ipoh- XD- 12/03/2024
--

Manholes GPS Coordinates












MANHOLE	LATITUDE	LONGTITUDE
EXISTING MH 1 (DIGI)	4.512503	101.048636
EXISTING MH 2 (DIGI)	4.514665	101.049971
EXISTING MH 3 (DIGI)	4.515590	101.051776
EXISTING MH 4 (DIGI)	4.516920	101.053412

Section 3 : - Bill of Quantity

Section 4 : OSP Routing Plan


Section 4 : OSP Routing Plan




LEGEND :			
	HDD PIPE		EXT. MH
	OPEN CUT (GRASS VERGE)		PROPOSED MH
	DISTANCE		TOWER
	LAMP POLE		POLE
	G.I PIPE		CABLE 144C
			CABLE 96C

Section 5 : OSP Snapshot

Section 5: Outside Plant Site Snapshot

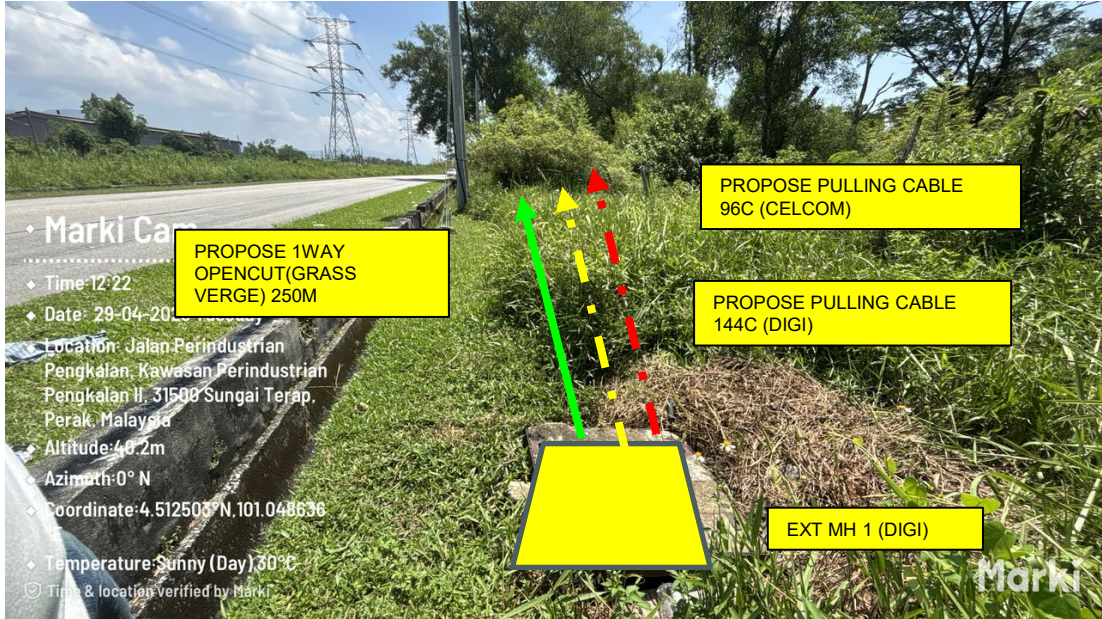


LOCATION : Jalan Perindustrian Pengkalan Ipoh Perak

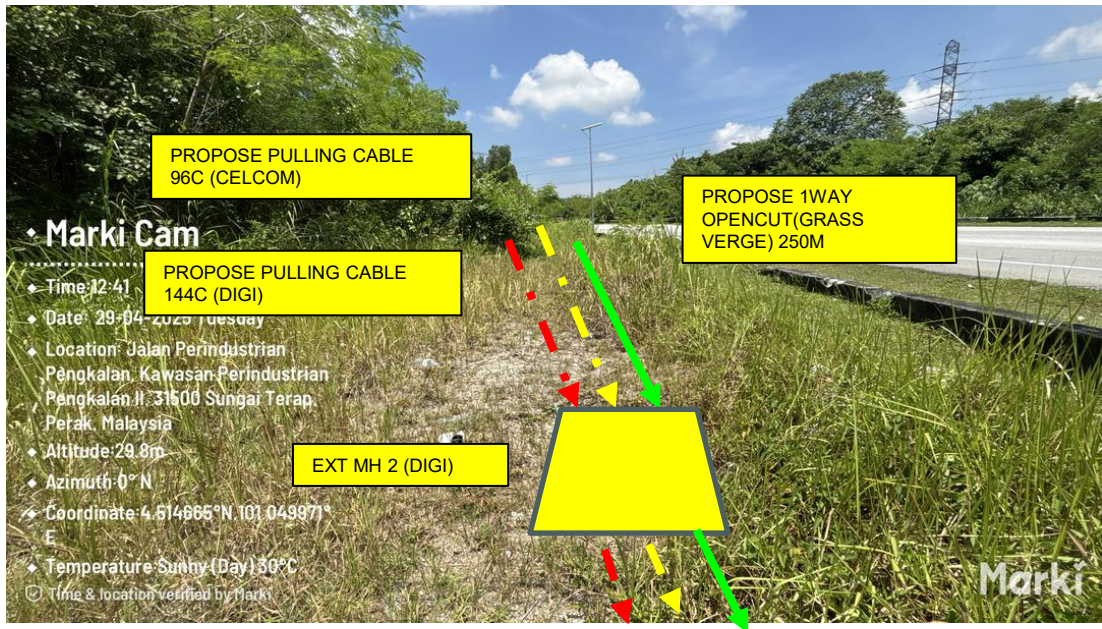


LOCATION : Jalan Perindustrian Pengkalan Ipoh Perak

Section 5: Outside Plant Site Snapshot

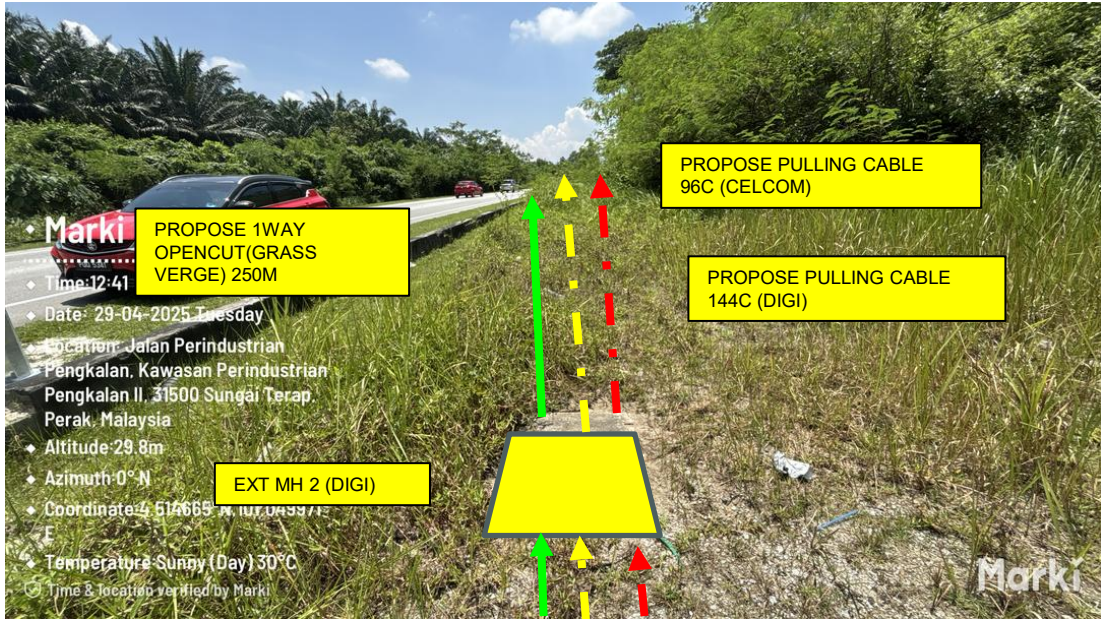


LOCATION : Jalan Perindustrian Pengkalan Ipoh Perak

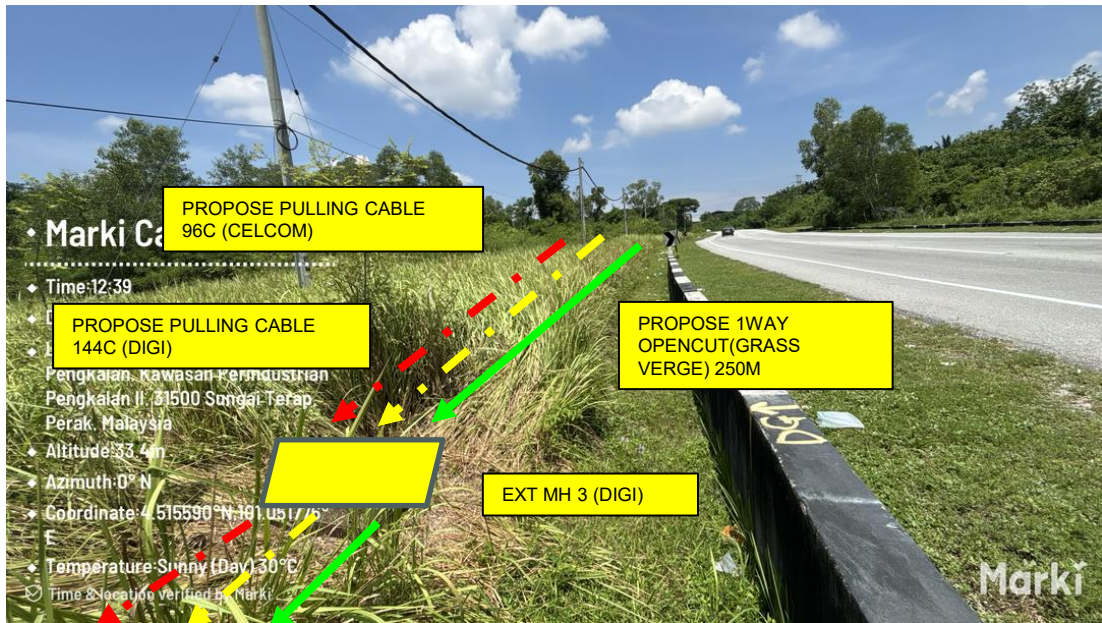


LOCATION : Jalan Perindustrian Pengkalan Ipoh Perak

Section 5: Outside Plant Site Snapshot

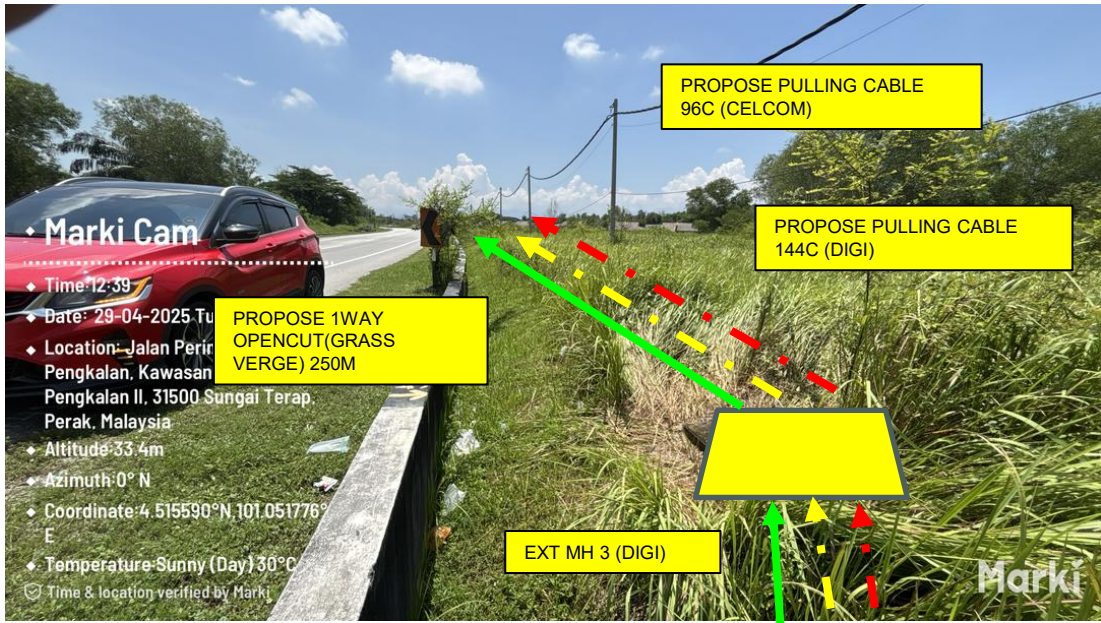

LOCATION : Jalan Perindustrian Pengkalan Ipoh Perak

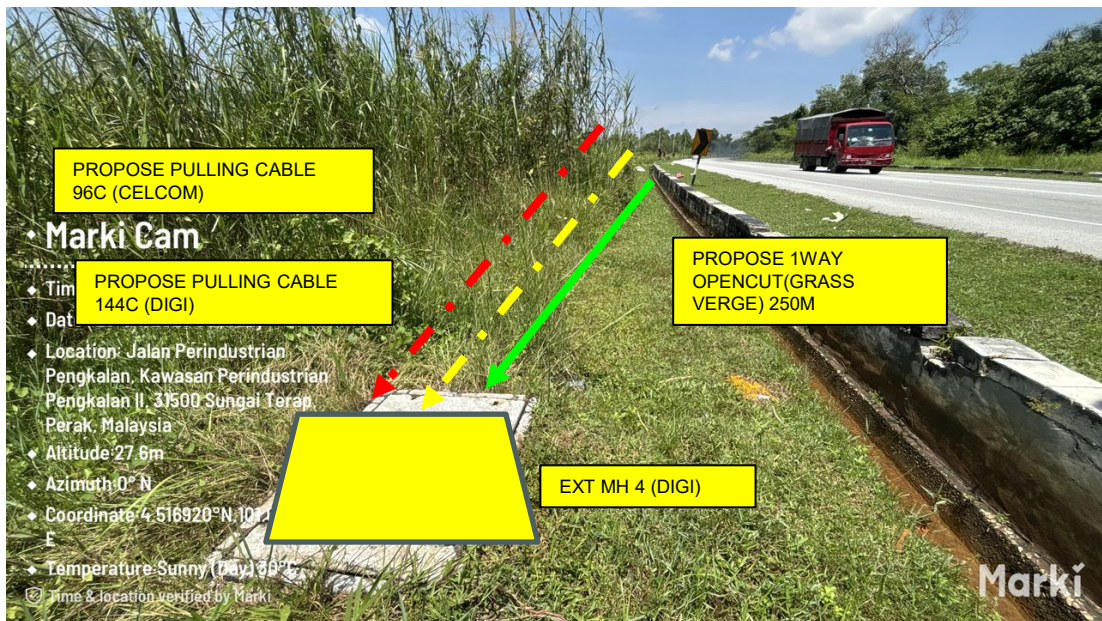

LOCATION : Jalan Perindustrian Pengkalan Ipoh Perak

Section 6 : Room/Cabin Layout

Location of Rack and ODF

Section 7:3rd Party Listing

Section 8: Work Schedule

Work Schedule

No.	Task name	Weeks							
		1	2	3	4	5	6	7	8
1	CIVIL INFRASTRUCTURE WORKS								
1.1	Mobilization								
1.2	Supply and Install MH c/w Accessories								
1.3	HDD Works								
1.4	Trenching Works								
1.5	Micro Trenching Works								
1.6	Supply and Install 4x32mm Sub-Duct								
1.7	Testing & Commissioning of Civil Infra*								
2	CABLE WORKS								
2.1	Laying of OFC 144C or 96C								
2.2	Splicing & Termination								
2.3	Testing & Commissioning*								
3	SITE ACCEPTANCE								
3.1	Handover Document								