

Technical Proposal for TM Project


SYARIKAT OSMANIA LOGISTICS SDN BHD (7338-T)



Project Description:	SRR FTTH PPP_C024_PINGGIRAN PENGKALAN 23&4 (ENGLISH HOUSE)
Project Number:	TMNA/252571
TM Node	PPP(PASIR PUTEH)
Region	Northern
NE ID	PPP_C024
Total FTTH Ports	24
Total Property	32
PF (%)	75%
RFSI Date	28 Jun 2026
GPS Coordinate	4.550504,101.081074

Prepared by:	BASRI
Company Name:	SYARIKAT OSMANIA LOGISTICS SDN. BHD.
Date:	15/12/2025
TP Revision:	0

3.1 NEW POLE PLAN

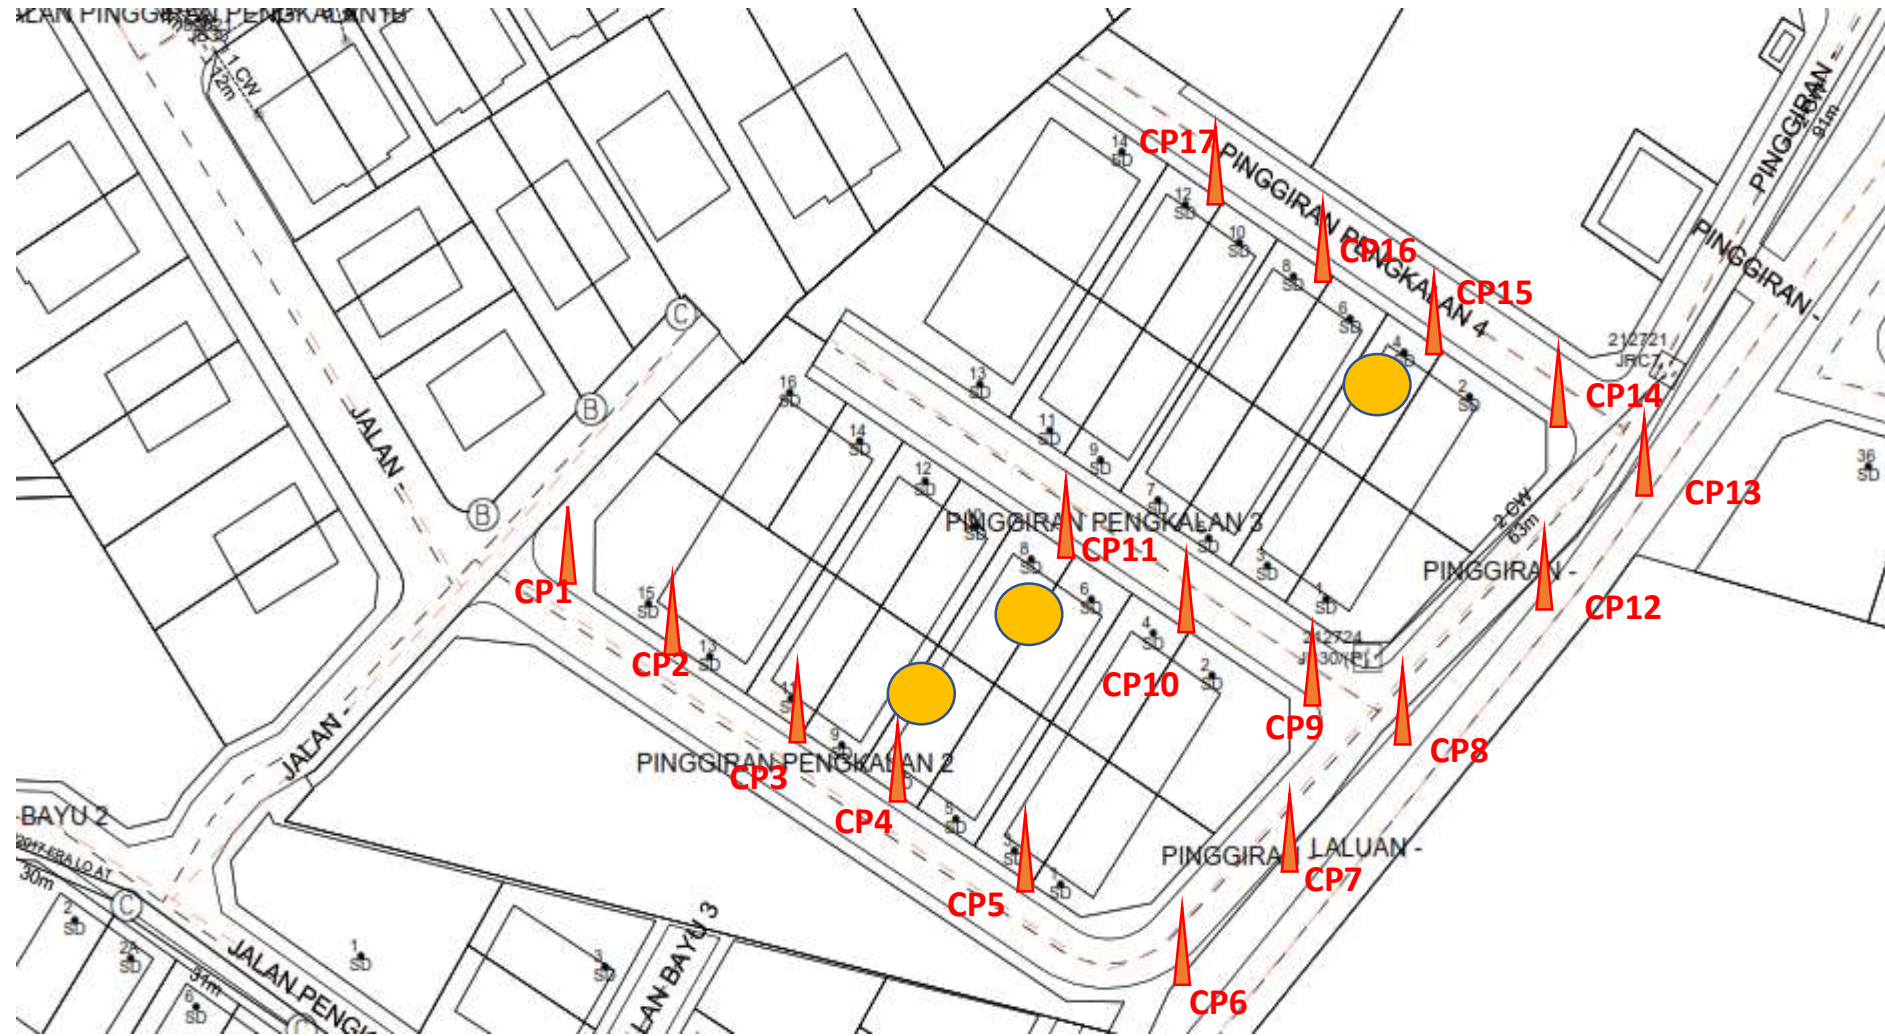

Legend:



FDC



FDP



FOSC



POLE

3.2 New Pole details

No	POLE ID	Pole Type	GPS Coordinate
1	1	Concrete Pole 7.6m	4°33'1.91"N 101° 4'49.65"E
2	2	Concrete Pole 7.6m	4°33'1.55"N 101° 4'50.21"E
3	3	Concrete Pole 7.6m	4°33'1.17"N 101° 4'50.79"E
4	4	Concrete Pole 7.6m	4°33'0.79"N 101° 4'51.37"E
5	5	Concrete Pole 7.6m	4°33'0.40"N 101° 4'51.95"E
6	6	Concrete Pole 7.6m	4°32'59.90"N 101° 4'52.72"E
7	7	Concrete Pole 7.6m	4°33'0.47"N 101° 4'53.22"E
8	8	Concrete Pole 7.6m	4°33'1.05"N 101° 4'53.73"E
9	9	Concrete Pole 7.6m	4°33'1.32"N 101° 4'53.32"E
10	10	Concrete Pole 7.6m	4°33'1.65"N 101° 4'52.76"E
11	11	Concrete Pole 7.6m	4°33'2.02"N 101° 4'52.17"E
12	12	Concrete Pole 7.6m	4°33'1.84"N 101° 4'54.50"E
13	13	Concrete Pole 7.6m	4°33'2.48"N 101° 4'55.04"E
14	14	Concrete Pole 7.6m	4°33'2.75"N 101° 4'54.64"E
15	15	Concrete Pole 7.6m	4°33'3.06"N 101° 4'54.07"E
16	16	Concrete Pole 7.6m	4°33'3.43"N 101° 4'53.47"E
17	17	Concrete Pole 7.6m	4°33'3.78"N 101° 4'52.90"E


3.3 New Pole Illustration



Nama jalan



PINGGIRAN PENGKALAN 3

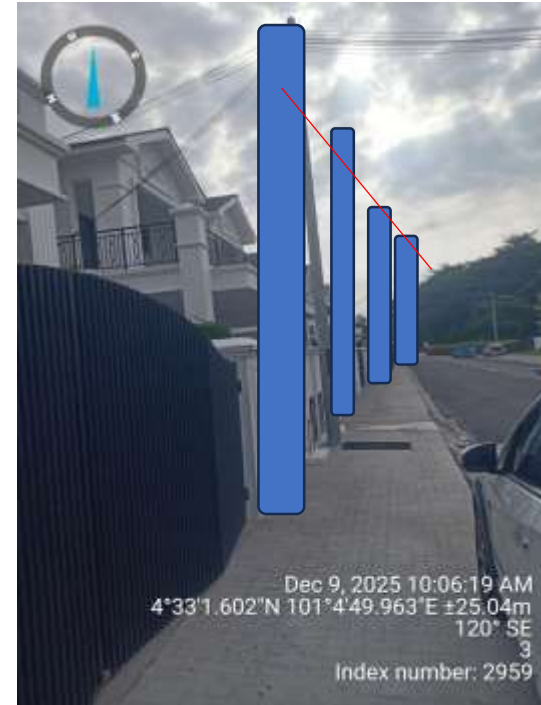

PINGGIRAN PENGKALAN 4

END OF TECHNICAL PROPOSAL