


Technical Proposal for TM Project



Project Description:	SRR FTTH KMT_C018 TMN KAMUNTING AMAN
Project Number:	TMNA/251400
TM Node	KMT
Region	NORTHERN
SITE ID	(PRK-SRI-2512585-TP)
RFSI Date	
GPS Coordinate	4.89698333179185, 100.694537359752

Prepared by:	NURFAZLIANA BINTI FAIZUL
Company Name:	SRI COMMUNICATION SDN BHD
Date:	6/5/2025
TP Revision:	0

2.1 Detail Fiber Route to the site (In details)

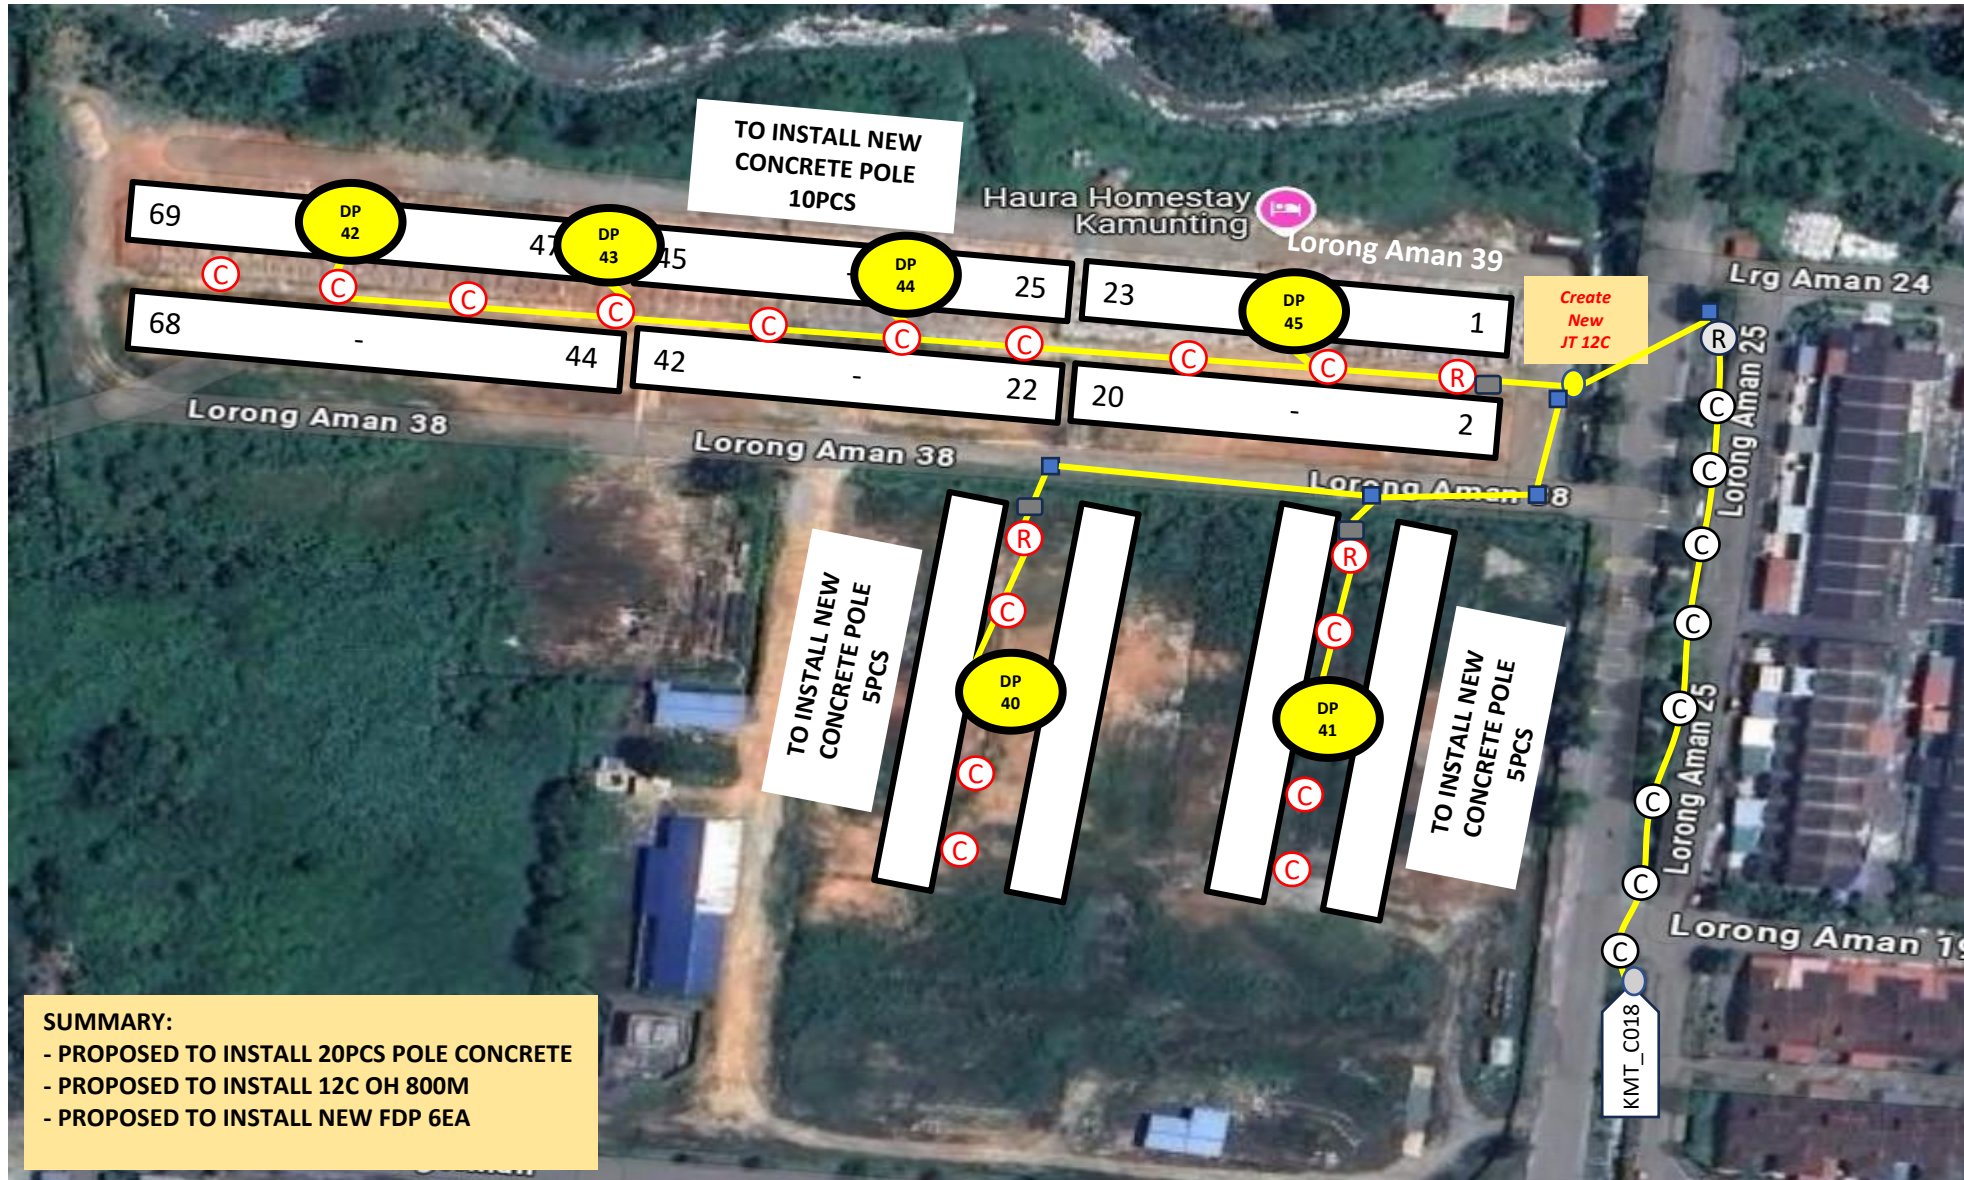

SUMMARY:
 - PROPOSED TO INSTALL 20PCS POLE CONCRETE
 - PROPOSED TO INSTALL 12C OH 800M
 - PROPOSED TO INSTALL NEW FDP 6EA

SIZE KABEL	JARAK COOEPR (m)	JARAK FIBER (m)

TMNA/251400
 SRR FTTH KMT_C018 TMN
 KAMUNTING AMAN (PRK-SRI-
 2512585-TP)

- FDC
 - NEW FDP
 - Manhole
 - JB
 - Joint
 - Rizer
 - Iron Pole (Existing)
 - Concrete Pole (New)
 - Concrete Pole (Exist)
- 12C IB

DISEDIAKAN OLEH:

Nurfaiz
 SRI COMMUNICATION SDN BHD
 NURFAZLIANA BINTI FAIZUL
 TEKNIKAL EKSEKUTIF
 fazliana@srieomm.com.my
 017-7750982

DISEMAK OLEH:

CONTACT PERSON


TMNA/251400
 SRR FTTH KMT_C018 TMN KAMUNTING AMAN (PRK-SRI-2512585-TP)

4.1 Pole Details

	POLE	Lat/Long
1.	CONCRETE (RIZER)	4.894745, 100.694949
2.	CONCRETE	4.894752, 100.694798
3.	CONCRETE	4.894771, 100.694647
4.	CONCRETE	4.894775, 100.694548
5.	CONCRETE	4.894790, 100.694425
6.	CONCRETE	4.894800, 100.694308
7.	CONCRETE	4.894815, 100.694167
8.	CONCRETE	4.894832, 100.693983
9.	CONCRETE	4.894854, 100.693843
10.	CONCRETE	4.894862, 100.693737

	POLE	Lat/Long
11.	CONCRETE (RIZER)	4.896369, 100.695522
12.	CONCRETE	4.896195, 100.695495
13.	CONCRETE	4.895907, 100.695450
14.	CONCRETE	4.895567, 100.695404
15.	CONCRETE	4.895344, 100.695389
16.	CONCRETE (RIZER)	4.896372, 100.695013
17.	CONCRETE	4.896210, 100.694918
18.	CONCRETE	4.895900, 100.694918
19.	CONCRETE	4.895616, 100.694884
20.	CONCRETE	4.895386, 100.694884

4.2 Pole Details (Picture on site)

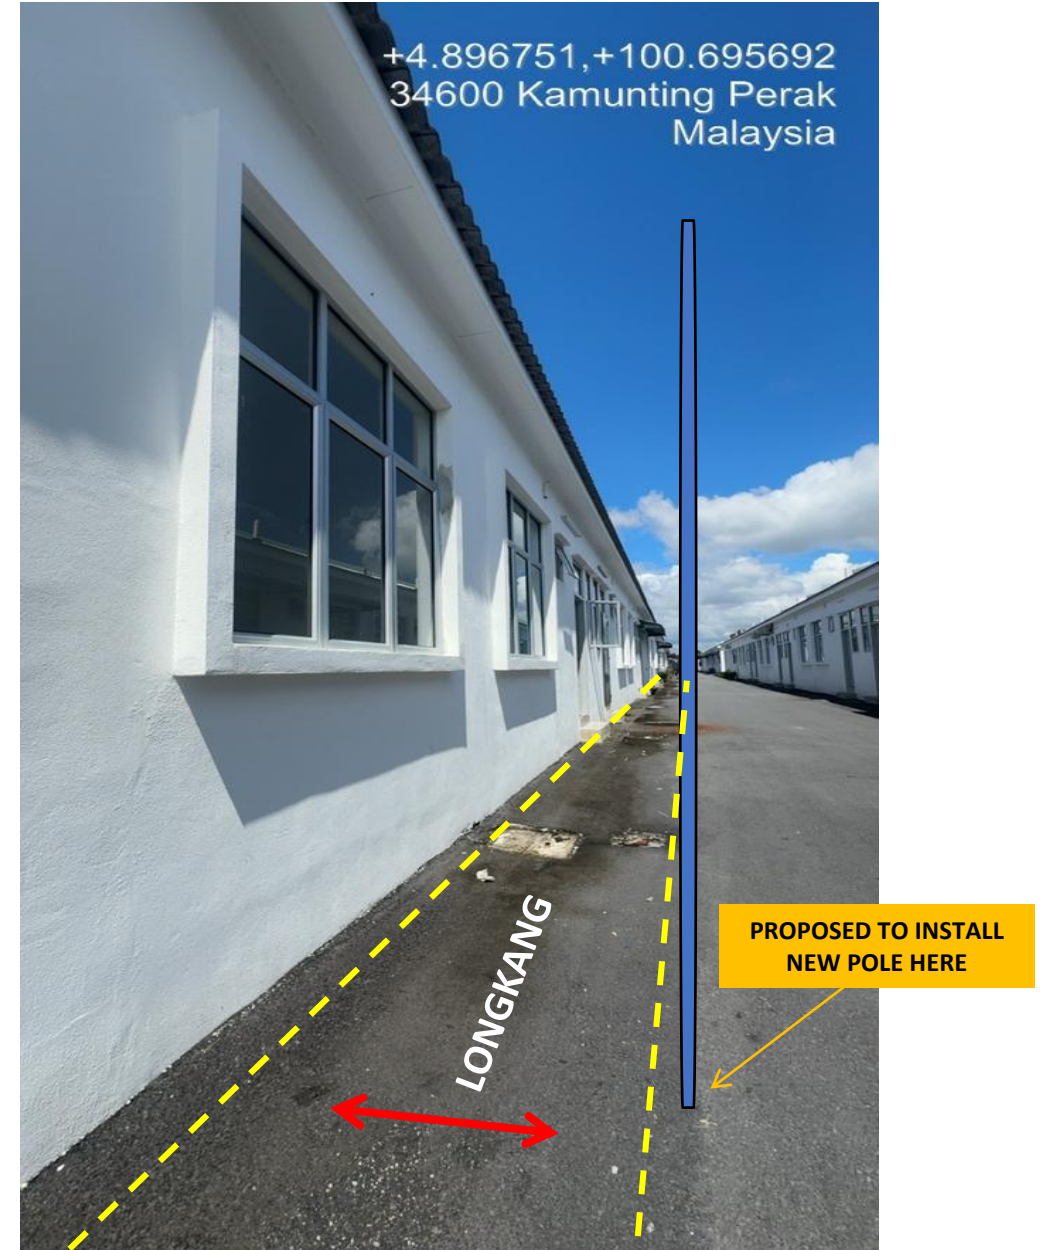

END OF TECHNICAL PROPOSAL