

Technical Proposal for TM Project

SYARIKAT OSMANIA LOGISTICS SDN BHD
(7338-T)



Project Description:	SRR FTTH TJR_CXXX JALAN KEKWA 78&9 FASA TAMBAHAN (TAMAN KINDING FLORA)
Project Number:	TMNA/251974
TM Node	TJR
Region	Northern
NE ID	TJR_C021
Total FTTH Ports	48
Total Property	90
PF (%)	53%
RFSI Date	30 SEPT 2025
GPS Coordinate	4°41'54.35"N 101° 8'41.72"E

Prepared by:	BASRI
Company Name:	SYARIKAT OSMANIA LOGISTICS SDN. BHD.
Date:	24/8/2025
TP Revision:	0

3.1 New Pole Plan




Legend:

	FDC		FDP		FOSC		POLE
---	-----	---	-----	--	------	---	------

3.2 New Pole details

No	POLE ID	Pole Type	GPS Coordinate
1	1	Concrete Pole 7.5m	4°41'51.41"N 101° 8'43.52"E
2	2	Concrete Pole 7.5m	4°41'51.35"N 101° 8'42.93"E
3	3	Concrete Pole 7.5m (DP)	4°41'51.26"N 101° 8'42.11"E
4	4	Concrete Pole 7.5m	4°41'51.23"N 101° 8'41.32"E
5	5	Concrete Pole 7.5m (DP)	4°41'52.91"N 101° 8'41.23"E
6	6	Concrete Pole 7.5m	4°41'52.94"N 101° 8'42.02"E
7	7	Concrete Pole 7.5m (DP)	4°41'52.97"N 101° 8'42.83"E
8	8	Concrete Pole 7.5m	4°41'52.99"N 101° 8'43.41"E
9	9	Concrete Pole 7.5m (DP)	4°41'54.53"N 101° 8'41.09"E
10	10	Concrete Pole 7.5m	4°41'54.58"N 101° 8'41.89"E
11	11	Concrete Pole 7.5m (DP)	4°41'54.63"N 101° 8'42.71"E
12	12	Concrete Pole 7.5m	4°41'54.62"N 101° 8'43.30"E
13	13	Concrete Pole 7.5m	4°41'56.18"N 101° 8'40.74"E
14	14	Concrete Pole 7.5m (DP)	4°41'56.17"N 101° 8'41.63"E
15	15	Concrete Pole 7.5m	4°41'56.25"N 101° 8'42.35"E
16	16	Concrete Pole 7.5m	4°41'56.25"N 101° 8'42.95"E
17			
18			

3.3 New Pole Illustration

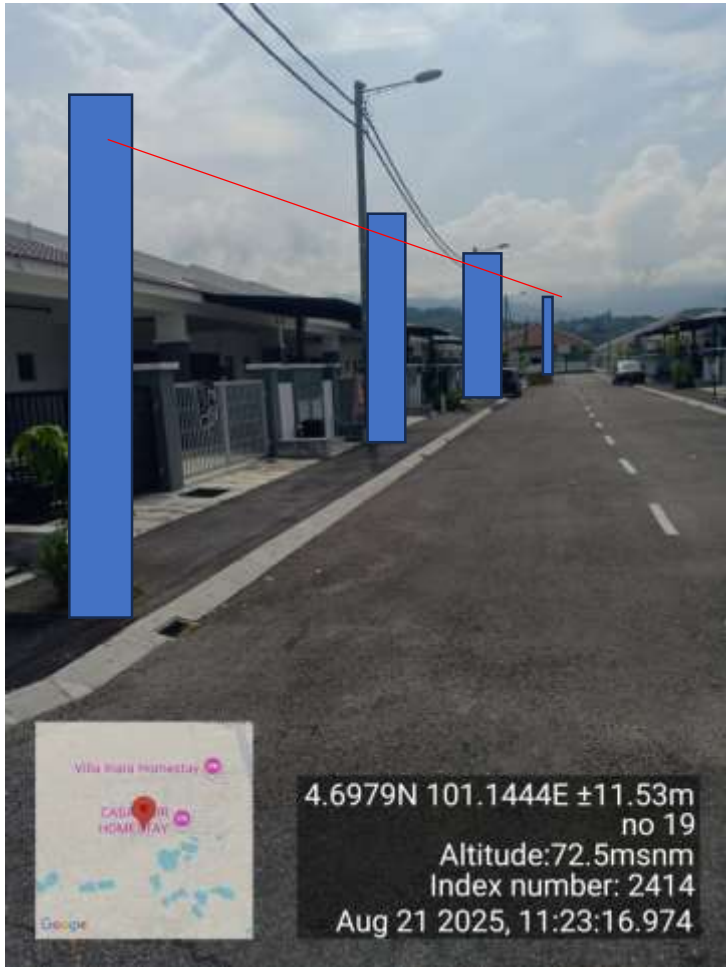

Concrete Pole 5 - 8



Concrete Pole 9 - 12



Pole 14– Pole 16

OPEN TRENCH FROM PITT TO NEW POLE